Ladder helght at or above 3000mm [118 1/8"] require safety side ralls SL.6052.KL Technical drawings are subject to change without notice.

All millimeter dimensions are exact and supersede inch conversions. Date Prepared: October 2018 Vario Telescoping Ladder SL.6005.KL Example:
- Curved rall
- Rail radius on request \*Mounting positions may be specified on purchase order Ø30mm [1 3/16"] SL 6011 KL > 150mm [5 7/8"] \*max. 900mm [35 7/16"] 430mm [16 15/16"] 400mm [15 3/4"] Prepared By: CDA | JRT Ø20mm [13/16"] SL\_6061.K


/Ø45mm [1 3/4"]


May be substituted with SL\_6063.KL Ø25mm [1"] \ST.2005.VA ST.2000 ST.2005.R.350 ST 3005 VA Specify center line rail height AFF on purchase order 95mm [3 3/4"] 32.5mm [1 1/4"] <u>["81\81 9] mm03s</u> ["31/E1 9] mm03S Rosette Ø50mm 0 32.5mm [1 1/4"] 0 Copyright MWE NA Inc., all rights reserved. Reproduction or other use of these designs without written consent from MWE NA Inc. is prohibited. All ladder systems require reinforced walls, cabinets, or shelving. Ø20mm [13/16"] SL 6011 KL \*\*Ladder height above 3000mm [118 1/8"] requires alternative telescoping head ["<u>81\8 S] mm88</u>\*\* at 65mm [2 9/16"] Email: info@mwe-na.com ZORTH www.mwe-na.com AMERIC

Technical drawings are subject to change without notice.

All millimeter dimensions are exact and supersede inch conversions.

Ladder helght at or above 3000mm [118 1/8"] require safety side ralls SL.6052.KL

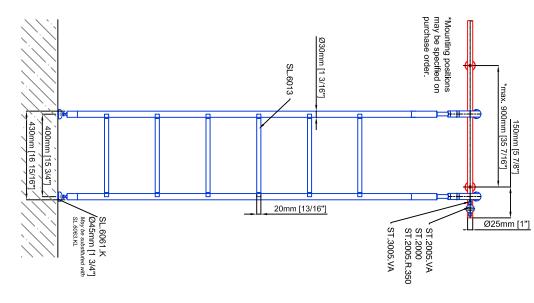



## Vario Telescoping Ladder SL 6005 KLE

Email: info@mwe-na.com


www.mwe-na.com

ZORTH

AMERIC

Date Prepared: October 2018

Prepared By: CDA | JRT

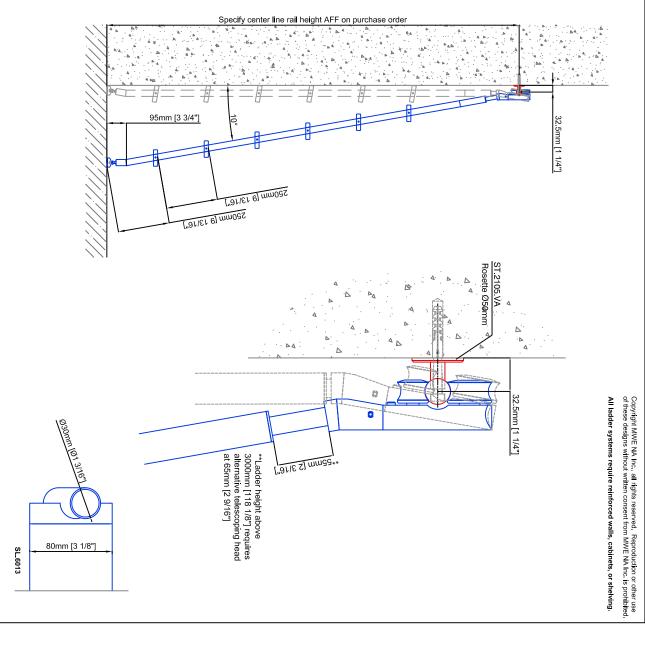


Technical drawings are subject to change without notice.

All millimeter dimensions are exact and supersede inch conversions.

Copyright MWE NA Inc., all rights reserved. Reproduction or other use of these designs without written consent from MWE NA Inc. is prohibited.

Ladder helght at or above 3000mm [118 1/8"] require safety side ralls SL.6052.KL

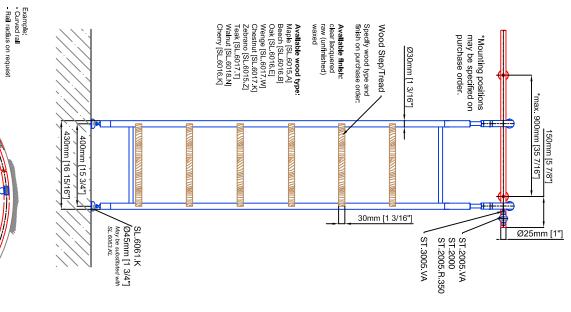

## Vario Telescoping Ladder SL 6005 KL.H

Date Prepared: October 2018

Prepared By: CDA | JRT

37.5mm [1 1/2"] 95mm [3 3/4"] ["81\£! 9] mm03S ["31\£! 9] mm03S ST 2105 VA Rosette Ø50mm 8 32.5mm [1 1/4"] All ladder systems require reinforced walls, cabinets, or shelving. 0 ["<u>81\8 SJ mm88</u>\*\* 3000mm [118 1/8"] requires alternative telescoping head at 65mm [2 9/16"] \*\*Ladder height above 80mm [3 1/8"]



Email: info@mwe-na.com